


## Covers

### Product Data Sheet



#### LTX 40

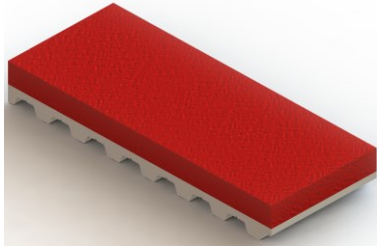

#### Product Designation

Code Description	Red Rubber Linatex
Product Group	Coverd
Belt Applications	Packaging, Ceramic, Glass, Paper&Print
ATK Part No	120 01 003

#### Product Construction

Product Material	Natural Rubber
Product Structure	Rough
Product Color	Red
Oil Resitance	Good
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	3 -6 mm
Hardness	40 ShrA
Minimum Pulley Diameter	Cover Thickness x 20
Operating Temperature	-30/+70 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### LND 60

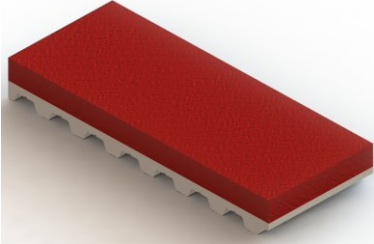

#### Product Designation

Code Description	Red Rubber Linard
Product Group	Coverd
Belt Applications	Packaging, Ceramic, Glass, Offset
ATK Part No	120 01 004

#### Product Construction

Product Material	Natural Rubber
Product Structure	Rough
Product Color	Red
Oil Resitance	Good
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	3 -5 - 6 - 8 - 10 - 12 mm
Hardness	60 ShrA
Minimum Pulley Diameter	Cover Thickness x 30
Operating Temperature	-20/+70 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



LNTR 55

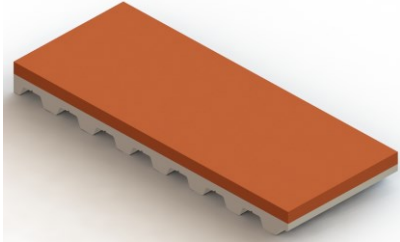

### Product Designation

Code Description	Linatril
Product Group	Coverd
Belt Applications	Oil Resistance, Packaging
ATK Part No	120 01 005

### Product Construction

Product Material	Nitrile Rubber
Product Structure	Rough
Product Color	Orange
Oil Resitance	Good
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	3 mm
Hardness	55 ShrA
Minimum Pulley Diameter	Cover Thickness x 25
Operating Temperature	-20/+110 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### LCRX 40

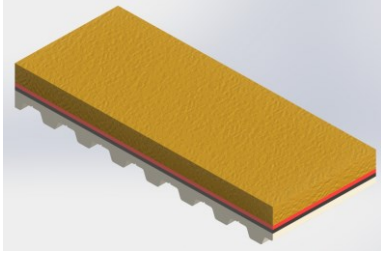

#### Product Designation

Code Description	Correx
Product Group	Coverd
Belt Applications	Packaging, Glass, Recycling
ATK Part No	120 01 006

#### Product Construction

Product Material	Natural Rubber
Product Structure	Rough
Product Color	Beige
Oil Resitance	Poor
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	6 - 10 mm
Hardness	40 ShrA
Minimum Pulley Diameter	Cover Thickness x 30
Operating Temperature	-20/+60 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### LFOB

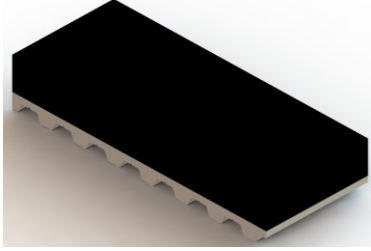

#### Product Designation

Code Description	Neoprene Rubber Foam
Product Group	Coverd
Belt Applications	Packaging, Glass, Medical, General Handling
ATK Part No	120 01 007

#### Product Construction

Product Material	Neoprene Rubber
Product Structure	Rough
Product Color	Black
Oil Resitance	Fair
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	6 - 7 - 8 - 9 - 10 - 13 mm
Hardness	200 Kg/m3
Minimum Pulley Diameter	Cover Thickness x 20
Operating Temperature	-20/+110 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information

##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.


Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### LFOO

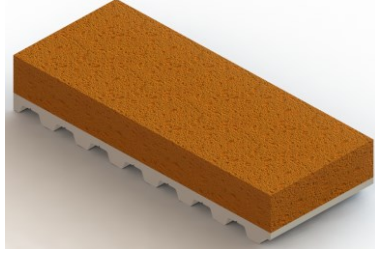

#### Product Designation

Code Description	Sentetic Rubber Foam
Product Group	Coverd
Belt Applications	Porcelain, Glass, General Handling
ATK Part No	120 01 008

#### Product Construction

Product Material	Sentetic Rubber
Product Structure	Rough
Product Color	Orange
Oil Resitance	Fair
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	10 - 15 - 20 mm
Hardness	300 Kg/m3
Minimum Pulley Diameter	Cover Thickness x 20
Operating Temperature	-20/+60 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### LRSG 50

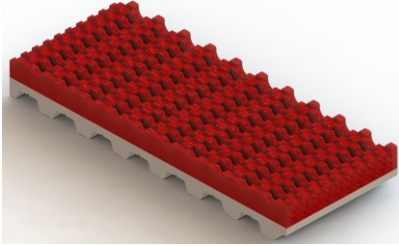

### Product Designation

Code Description	Supergrip Rubber
Product Group	Coverd
Belt Applications	Glass, Ceramic, Wooden
ATK Part No	120 01 009

### Product Construction

Product Material	Natural Rubber
Product Structure	Supergrip
Product Color	Red
Oil Resitance	Poor
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	4,5 - 10 mm
Hardness	50 ShrA
Minimum Pulley Diameter	Cover Thickness x 30
Operating Temperature	-20/+70 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PAPL 55

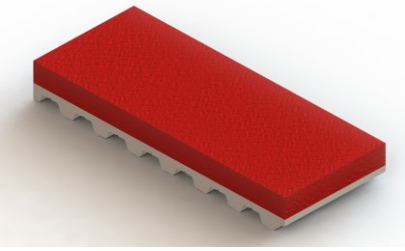

#### Product Designation

Code Description	Apl
Product Group	Coverd
Belt Applications	Ceramic, Glass, Paper, General Handling
ATK Part No	120 01 010

#### Product Construction

Product Material	Pu/Pvc
Product Structure	Rough
Product Color	Red
Oil Resitance	Good
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	3 - 6 mm
Hardness	55 ShrA
Minimum Pulley Diameter	Cover Thickness x 30
Operating Temperature	-20/+60 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PUR 40

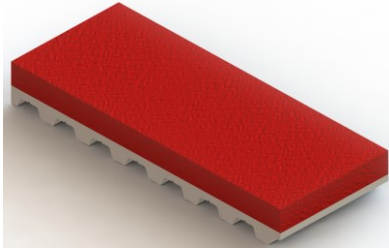

#### Product Designation

Code Description	Tpu 40
Product Group	Coverd
Belt Applications	Ceramic. Glass, Packaging, Offset
ATK Part No	120 01 011

#### Product Construction

Product Material	Termoplastic Polyurethane
Product Structure	Matt
Product Color	Red
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	2 - 3 - 5 - 6 mm
Hardness	40 ShrA
Minimum Pulley Diameter	Cover Thickness x 20
Operating Temperature	-20/+80 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PUR 55

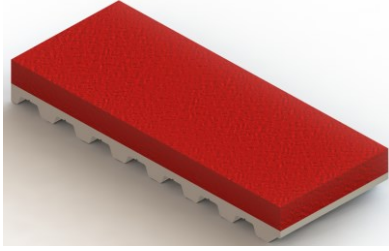

#### Product Designation

Code Description	Tpu 55
Product Group	Coverd
Belt Applications	Ceramic. Glass, Packaging, Offset
ATK Part No	120 01 012

#### Product Construction

Product Material	Termoplastic Polyurethane
Product Structure	Matt
Product Color	Red
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	2 - 3 - 5 - 6 mm
Hardness	55 ShrA
Minimum Pulley Diameter	Cover Thickness x 30
Operating Temperature	-20/+80 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PUR 85

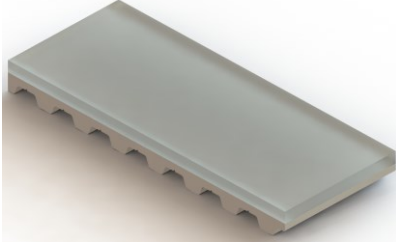

#### Product Designation

Code Description	Tpu 85
Product Group	Coverd
Belt Applications	Ceramic. Glass, Medical, Offset
ATK Part No	120 01 013

#### Product Construction

Product Material	Termoplastic Polyurethane
Product Structure	Matt
Product Color	Transparent
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	2 - 3 - 5 - 6 mm
Hardness	85 ShrA
Minimum Pulley Diameter	Cover Thickness x 40
Operating Temperature	-20/+80 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PUY 60

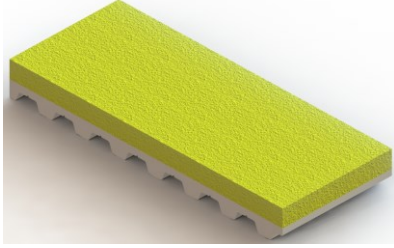

### Product Designation

Code Description	Tpu 60
Product Group	Coverd
Belt Applications	Extrusion Line, General Handling
ATK Part No	120 01 014

### Product Construction

Product Material	Termoplastic Polyurethane
Product Structure	Rough
Product Color	Yellow
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	2 - 3 - 5 - 6 mm
Hardness	60 ShrA
Minimum Pulley Diameter	Cover Thickness x 30
Operating Temperature	-20/+80 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet

#### PUBY 85

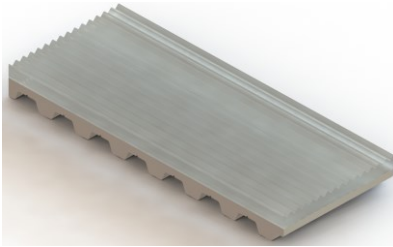

### Product Designation

Code Description	Tpu Ribbed
Product Group	Coverd
Belt Applications	Ceramic. Glass, Medical, General Handling
ATK Part No	120 01 015

### Product Construction

Product Material	Termoplastic Polyurethane
Product Structure	Ribbed
Product Color	Transparent
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	2,5 mm
Hardness	85 ShrA
Minimum Pulley Diameter	85 mm
Operating Temperature	-20/+80 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PUFB 85

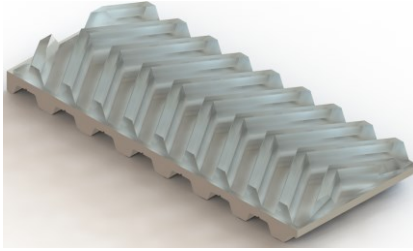

### Product Designation

Code Description	Tpu Fishbone
Product Group	Coverd
Belt Applications	Ceramic, Glass, Packaging
ATK Part No	120 01 016

### Product Construction

Product Material	Termoplastic Polyurethane
Product Structure	Fishbone
Product Color	Transparent
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	4 mm
Hardness	85 ShrA
Minimum Pulley Diameter	90 mm
Operating Temperature	-20/+80 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PUSGG 60

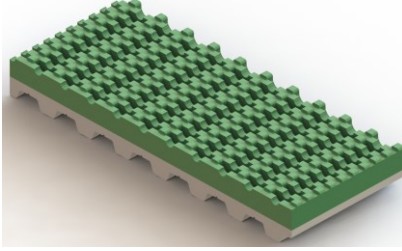

#### Product Designation

Code Description	Tpu Supergrip
Product Group	Coverd
Belt Applications	Ceramic, Glass, Angle transport
ATK Part No	120 01 017

#### Product Construction

Product Material	Termoplastic Polyurethane
Product Structure	Supergrip
Product Color	Green
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	5 mm
Hardness	60 ShrA
Minimum Pulley Diameter	70 mm
Operating Temperature	-20/+80 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



SYLBL

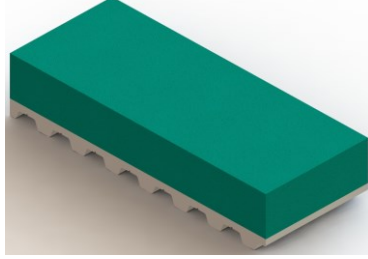

### Product Designation

Code Description	Sylomer Blue
Product Group	Coverd
Belt Applications	Glass bottle washer, Medical
ATK Part No	120 01 018

### Product Construction

Product Material	Polyuretane Foam
Product Structure	Rough
Product Color	Blue
Oil Resitance	Good
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	12,5 mm
Hardness	220 Kg/m3
Minimum Pulley Diameter	Cover Thickness x 15
Operating Temperature	-20/+70 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



SYLGR

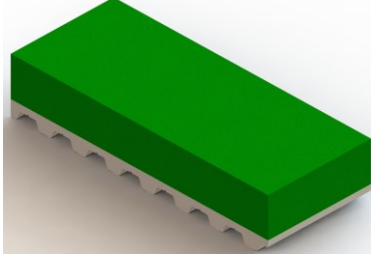

### Product Designation

Code Description	Sylomer Green
Product Group	Coverd
Belt Applications	Glass, Medical, Packaging
ATK Part No	120 01 019

### Product Construction

Product Material	Polyuretane Foam
Product Structure	Rough
Product Color	Green
Oil Resitance	Good
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	12,5 mm
Hardness	300 Kg/m3
Minimum Pulley Diameter	Cover Thickness x 15
Operating Temperature	-20/+70 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



SYLBR

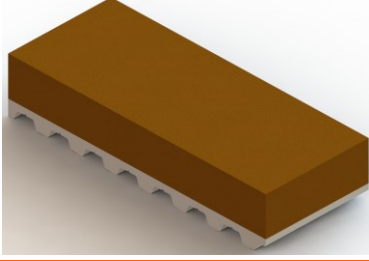

### Product Designation

Code Description	Sylomer Brown
Product Group	Coverd
Belt Applications	Glass, Medical
ATK Part No	120 01 020

### Product Construction

Product Material	Polyuretane Foam
Product Structure	Rough
Product Color	Brown
Oil Resitance	Good
Permanently Antistatic	No
Food Grade	No

### Technical Data

Standard Thickness (mm)	12,5 mm
Hardness	400 Kg/m3
Minimum Pulley Diameter	Cover Thickness x 20
Operating Temperature	-20/+70 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PVFLW

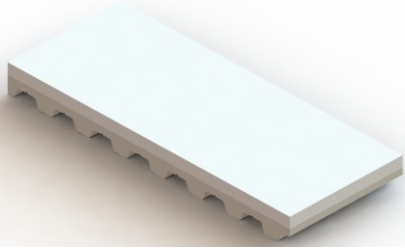

#### Product Designation

Code Description	Pvc White
Product Group	Coverd
Belt Applications	Food packaging
ATK Part No	120 01 021

#### Product Construction

Product Material	Pvc
Product Structure	Matt
Product Color	White
Oil Resitance	Fair
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Standard Thickness (mm)	2 mm
Hardness	65 ShrA
Minimum Pulley Diameter	40 mm
Operating Temperature	-20/+60 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PVIRG

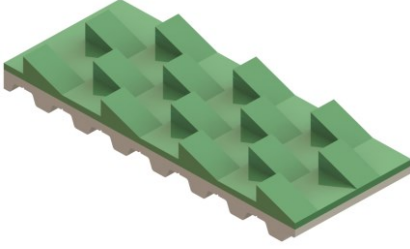

#### Product Designation

Code Description	Pvc Maxigrip
Product Group	Coverd
Belt Applications	Marble, Wooden, General Handling
ATK Part No	120 01 022

#### Product Construction

Product Material	Pvc
Product Structure	Maxigrip
Product Color	Green
Oil Resitance	Fair
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	8 mm
Hardness	65 ShrA
Minimum Pulley Diameter	70 mm
Operating Temperature	-20/+60 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



#### PVSGG

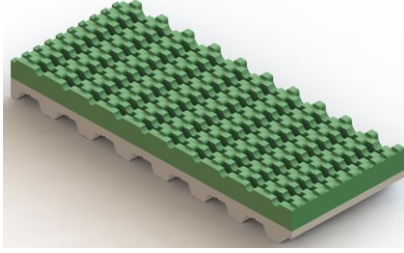

#### Product Designation

Code Description	Pvc Supergrip
Product Group	Coverd
Belt Applications	Glass, Ceramic, General Handling
ATK Part No	120 01 023

#### Product Construction

Product Material	Pvc
Product Structure	Supergrip
Product Color	Green
Oil Resitance	Fair
Permanently Antistatic	No
Food Grade	No

#### Technical Data

Standard Thickness (mm)	5 mm
Hardness	65 ShrA
Minimum Pulley Diameter	65 mm
Operating Temperature	-20/+60 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



### PVSGW

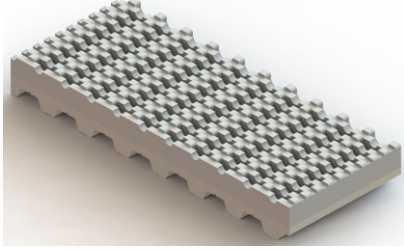

#### Product Designation

Code Description	Pvc Supergrip
Product Group	Coverd
Belt Applications	Food packaging
ATK Part No	120 01 024

#### Product Construction

Product Material	Pvc
Product Structure	Supergrip
Product Color	White
Oil Resitance	Fair
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Standard Thickness (mm)	5 mm
Hardness	65 ShrA
Minimum Pulley Diameter	65 mm
Operating Temperature	-20/+60 °C

#### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Covers

### Product Data Sheet



SLC 40

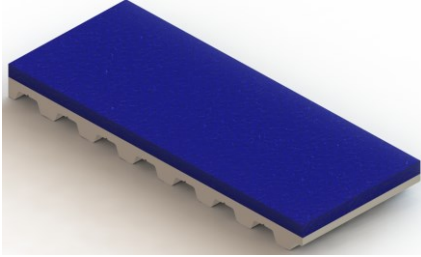

### Product Designation

Code Description	Silicon
Product Group	Coverd
Belt Applications	Packaging, Extruder Line, Food, Offset
ATK Part No	120 01 025

### Product Construction

Product Material	Silicon
Product Structure	Matt
Product Color	Blue
Oil Resitance	Very Good
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Standard Thickness (mm)	2 - 3 - 4 - 5 - 6 mm
Hardness	40 ShrA
Minimum Pulley Diameter	Cover Thickness x 25
Operating Temperature	-20/+230 °C

### Usage Instructions

Jointing Methods	Lamination
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com


## Applications



### GLASS

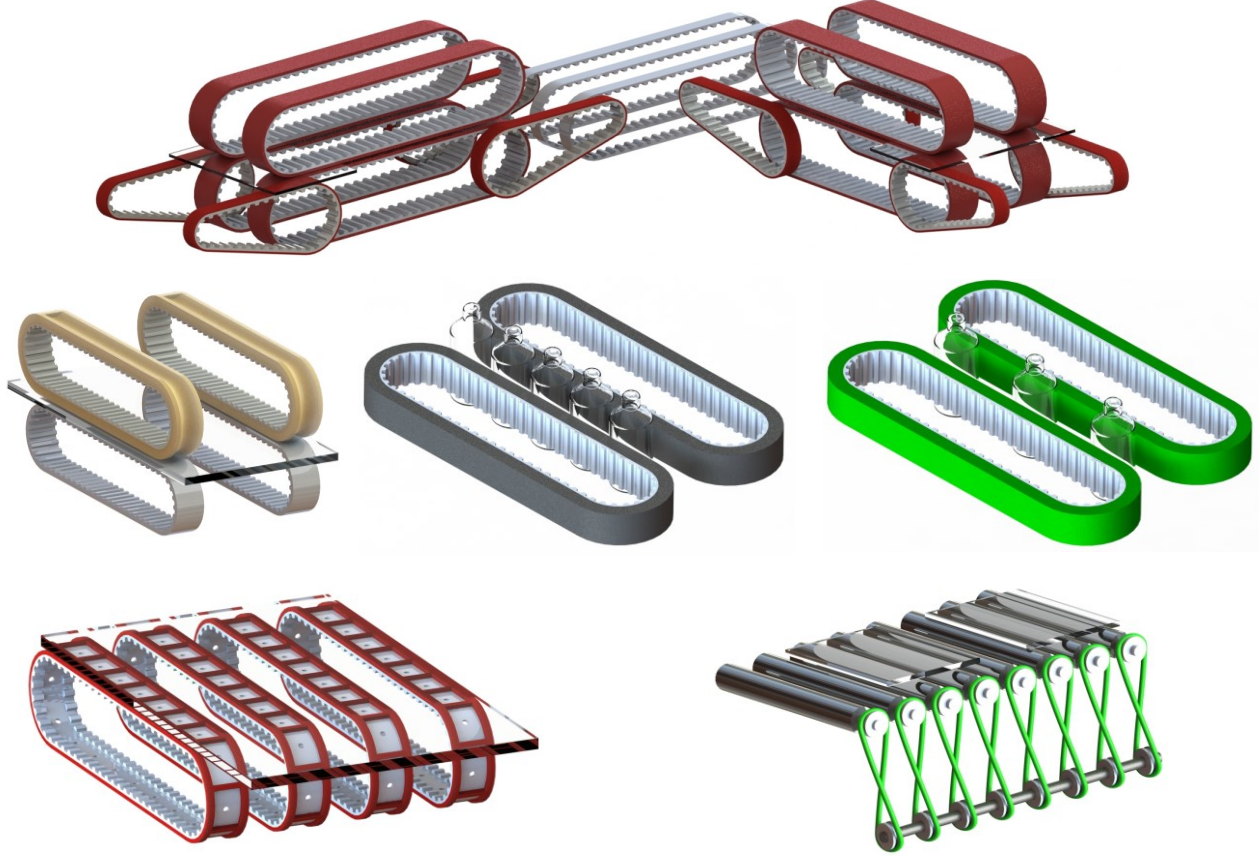

### CERAMIC TILES

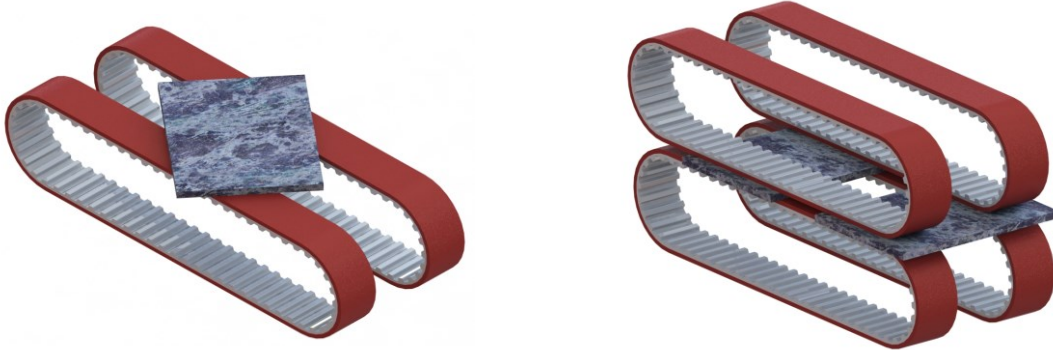

### Contact Information



#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com



## Applications





### PACKAGING

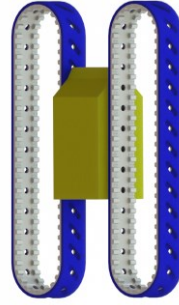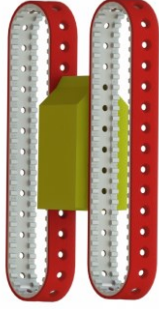

### EXTRUSION LINE

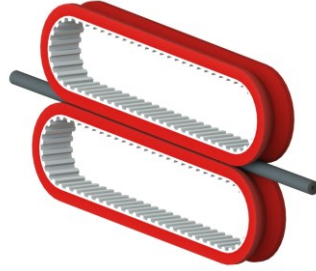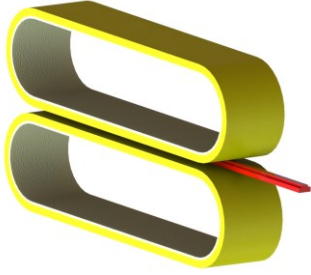

### PAPER & PRINT

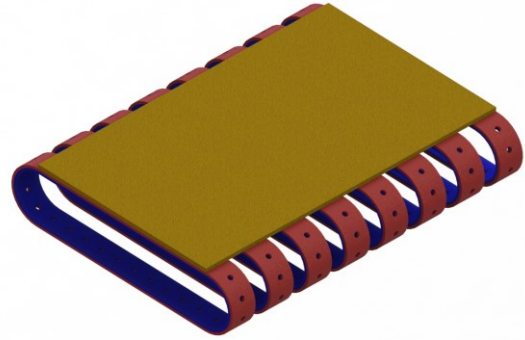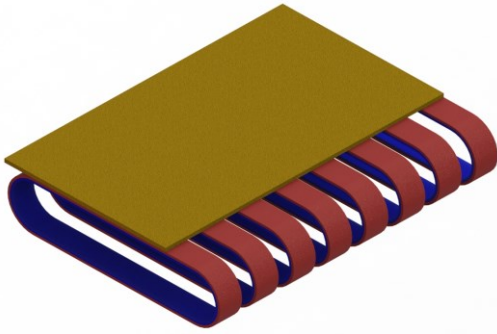

### Contact Information

#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com