


## Poliurethane Profile

### Product Data Sheet

RS GR 3



#### Product Designation

Code Description	3 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 003

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø3 mm
Minimum Pulley Diameter	30 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	0,32 N
Operating Temperature	-30/+60 °C
Packing Size	300 Mt - 400 Mt - 500 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 4

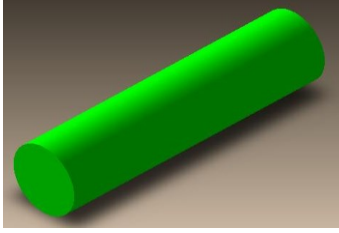

### Product Designation

Code Description	4 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 004

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø4 mm
Minimum Pulley Diameter	38 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	0,53 N
Operating Temperature	-30/+60 °C
Packing Size	300 Mt - 400 Mt - 500 Mt

### Usage Instructions

Jointing Methods	Direct Jointing
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 5

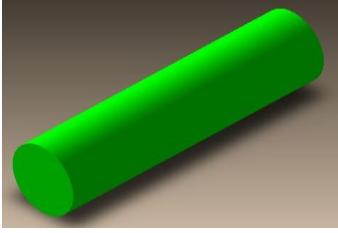

#### Product Designation

Code Description	5 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 005

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø5 mm
Minimum Pulley Diameter	49 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	0,86 N
Operating Temperature	-30/+60 °C
Packing Size	200 Mt - 300 Mt - 400 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 6

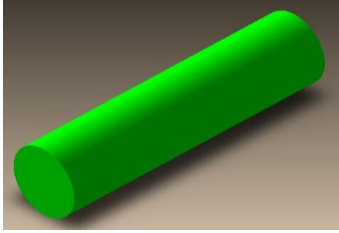

### Product Designation

Code Description	6 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 006

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø6 mm
Minimum Pulley Diameter	58 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	1,21 N
Operating Temperature	-30/+60 °C
Packing Size	200 Mt - 300 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 7

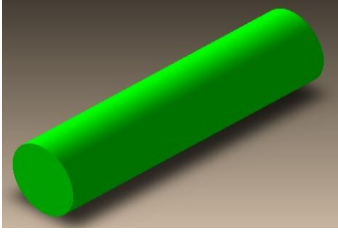

### Product Designation

Code Description	7 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 007

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø7 mm
Minimum Pulley Diameter	67 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	1,67 N
Operating Temperature	-30/+60 °C
Packing Size	200 Mt - 300 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 8

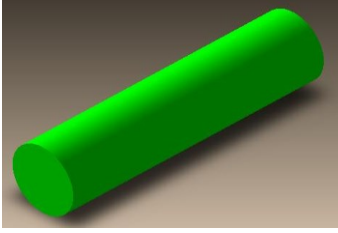

### Product Designation

Code Description	8 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 008

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø8 mm
Minimum Pulley Diameter	75 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	2,16 N
Operating Temperature	-30/+60 °C
Packing Size	100 Mt - 200 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 9

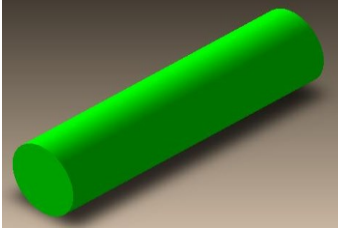

#### Product Designation

Code Description	9 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 009

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø9 mm
Minimum Pulley Diameter	87 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	2,77 N
Operating Temperature	-30/+60 °C
Packing Size	100 Mt - 200 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 10

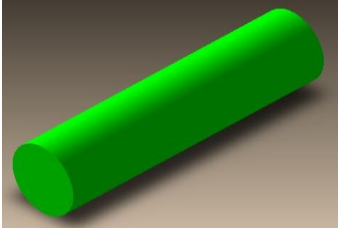

### Product Designation

Code Description	10 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 010

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø10 mm
Minimum Pulley Diameter	95 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	3,40 N
Operating Temperature	-30/+60 °C
Packing Size	100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 12

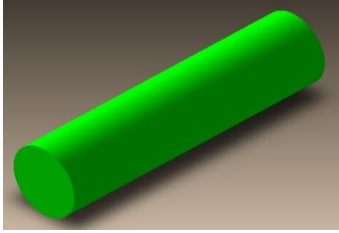

### Product Designation

Code Description	12 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 012

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø12 mm
Minimum Pulley Diameter	113 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	4,88 N
Operating Temperature	-30/+60 °C
Packing Size	50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 15

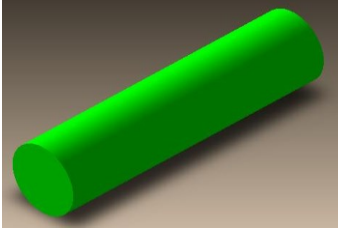

### Product Designation

Code Description	15 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 015

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø15 mm
Minimum Pulley Diameter	142 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	7,64 N
Operating Temperature	-30/+60 °C
Packing Size	50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 18

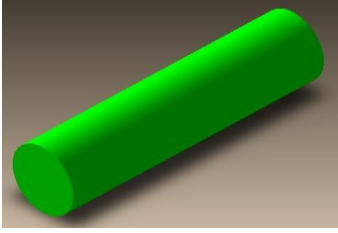

#### Product Designation

Code Description	18 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 018

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø18 mm
Minimum Pulley Diameter	174 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	11,30 N
Operating Temperature	-30/+60 °C
Packing Size	50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RS GR 20

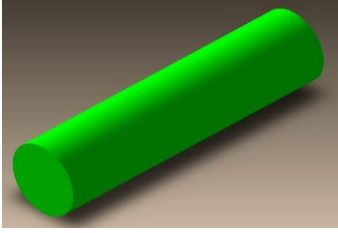

#### Product Designation

Code Description	20 mm Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 01 020

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Rough
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø20 mm
Minimum Pulley Diameter	188 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	13,56 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RSR GR 6

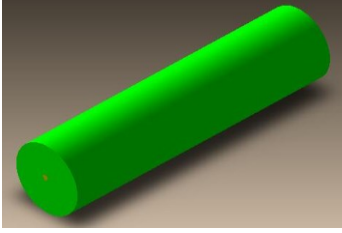

#### Product Designation

Code Description	6 mm Reinforced Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 02 006

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø6 mm
Minimum Pulley Diameter	60 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	16,00 N
Operating Temperature	-30/+60 °C
Packing Size	200 Mt - 300 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RSR GR 8

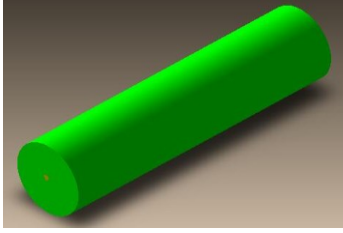

### Product Designation

Code Description	8 mm Reinforced Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 02 008

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø8 mm
Minimum Pulley Diameter	78 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	19,00 N
Operating Temperature	-30/+60 °C
Packing Size	100 Mt - 200 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RSR GR 10

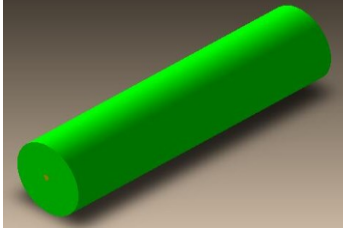

### Product Designation

Code Description	10 mm Reinforced Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 02 010

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø10 mm
Minimum Pulley Diameter	101 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	22,00 N
Operating Temperature	-30/+60 °C
Packing Size	100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RSR GR 12

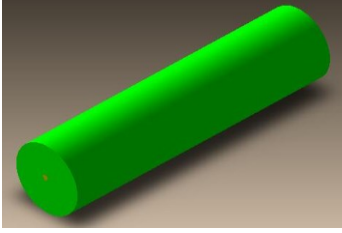

#### Product Designation

Code Description	12 mm Reinforced Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 02 012

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø12 mm
Minimum Pulley Diameter	119 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	25,00 N
Operating Temperature	-30/+60 °C
Packing Size	50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RSR GR 15

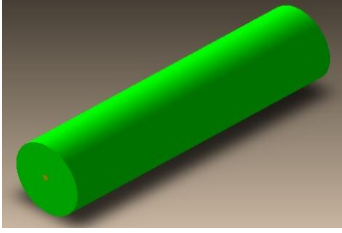

### Product Designation

Code Description	15 mm Reinforced Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 02 015

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	Ø15 mm
Minimum Pulley Diameter	150 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	27,00 N
Operating Temperature	-30/+60 °C
Packing Size	50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

RSR GR 18

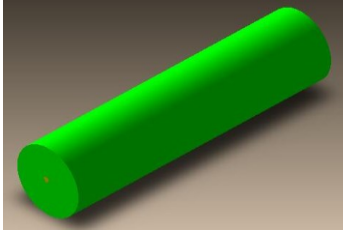

#### Product Designation

Code Description	15 mm Reinforced Green Poliurethane Round Belt
Product Group	Poliurethane Round Belt
Belt Applications	General Conveying , Power Transmission
Special Features	Elastic Belts
ATK Part No	115 02 018

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	Ø18 mm
Minimum Pulley Diameter	178 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	36,00 N
Operating Temperature	-30/+60 °C
Packing Size	50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 A

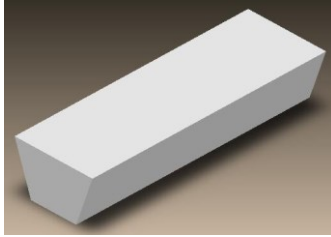

### Product Designation

Code Description	13 mm Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 011

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x8 mm
Minimum Pulley Diameter	50 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	1,60 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 ADT

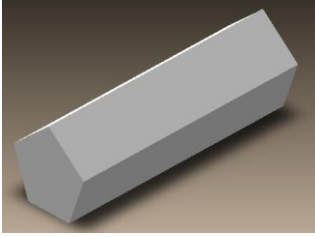

### Product Designation

Code Description	13 mm Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 012

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x16 mm
Minimum Pulley Diameter	100 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	2,70 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 AGT PU

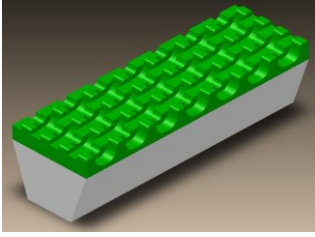

### Product Designation

Code Description	13 mm With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 30 013

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x13 mm
Minimum Pulley Diameter	50 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	1,60 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 B

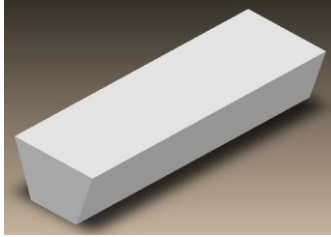

### Product Designation

Code Description	17 mm Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 014

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x11,5 mm
Minimum Pulley Diameter	75 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	2,90 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 BDT

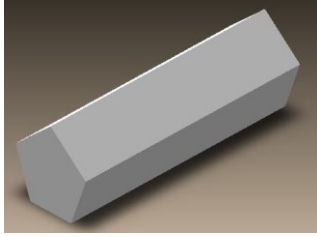

### Product Designation

Code Description	17 mm Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 015

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x19,5 mm
Minimum Pulley Diameter	130 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	4,30 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 BGT PU

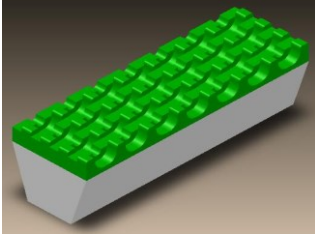

### Product Designation

Code Description	17 mm With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 30 016

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x16,5 mm
Minimum Pulley Diameter	75 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	2,90 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 C

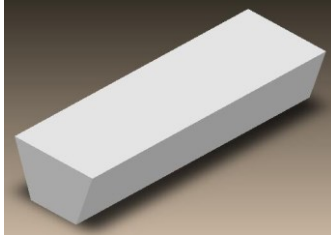

### Product Designation

Code Description	22 mm Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 017

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x14,5 mm
Minimum Pulley Diameter	100 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	4,80 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 CDT

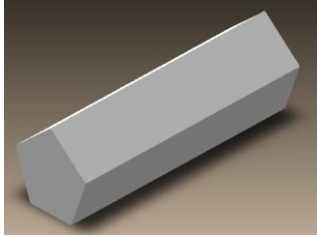

### Product Designation

Code Description	22 mm Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 018

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x24,5 mm
Minimum Pulley Diameter	165 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	7,90 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSW 85 CGT PU

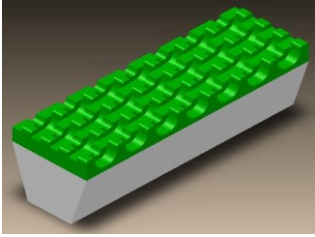

### Product Designation

Code Description	22 mm With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 30 019

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x19,5 mm
Minimum Pulley Diameter	100 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	4,80 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSWR 85 A

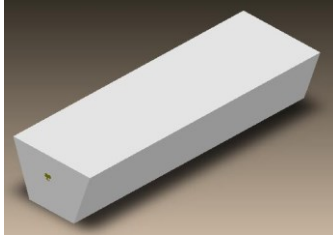

### Product Designation

Code Description	13 mm Reinforced Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 031

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x8 mm
Minimum Pulley Diameter	50 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	24,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSWR 85 ADT

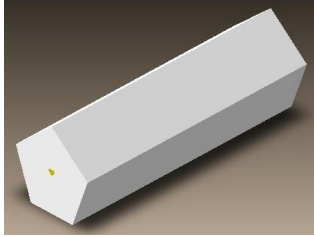

### Product Designation

Code Description	13 mm Reinforced Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 032

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x16 mm
Minimum Pulley Diameter	100 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	32,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSWR 85 AGT PU

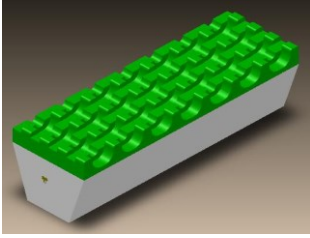

### Product Designation

Code Description	13 mm Reinforced With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 30 033

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x13 mm
Minimum Pulley Diameter	50 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	24,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSWR 85 B

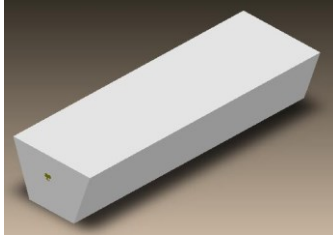

### Product Designation

Code Description	17 mm Reinforced Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 034

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x11,5 mm
Minimum Pulley Diameter	75 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	36,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSWR 85 BDT

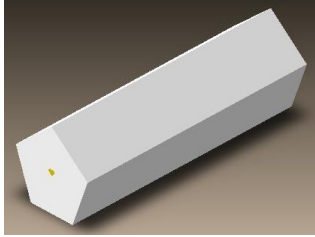

### Product Designation

Code Description	17 mm Reinforced Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 035

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x19,5 mm
Minimum Pulley Diameter	130 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	38,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

#### VSWR 85 BGT PU

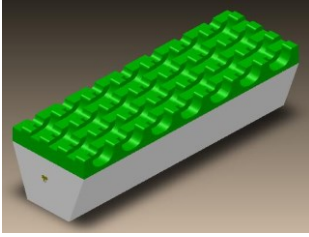

### Product Designation

Code Description	17 mm Reinforced With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 30 036

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x16,5 mm
Minimum Pulley Diameter	75 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	36,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information

#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com


Wep:

[www.atkbant.com](http://www.atkbant.com)

## Poliurethane Profile

### Product Data Sheet

VSWR 85 C

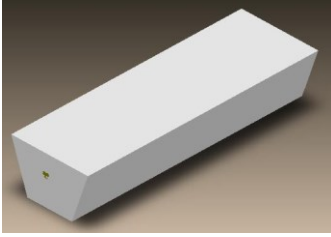

### Product Designation

Code Description	22 mm Reinforced Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 037

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x14,5 mm
Minimum Pulley Diameter	100 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	44,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSWR 85 CDT

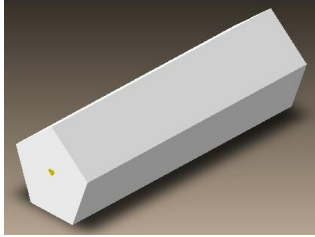

### Product Designation

Code Description	22 mm Reinforced Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 30 038

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x24,5 mm
Minimum Pulley Diameter	165 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	76,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSWR 85 CGT PU

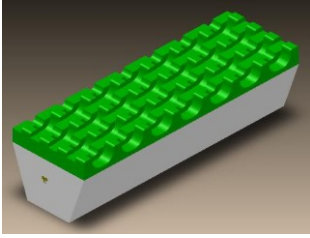

### Product Designation

Code Description	22 mm Reinforced With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 30 039

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x19,5 mm
Minimum Pulley Diameter	100 mm
Hardness	85 ShrA
Tensile Force For %1 Elongation	44,00 N
Operating Temperature	-30/+60 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 A

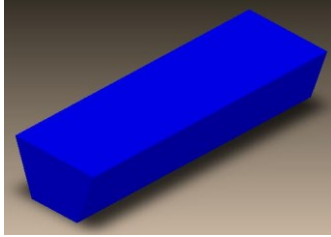

### Product Designation

Code Description	13 mm Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 011

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x8 mm
Minimum Pulley Diameter	80 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	6,70 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 ADT

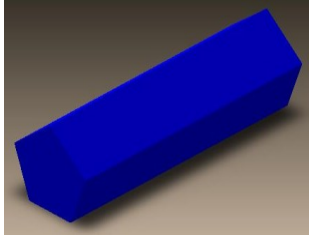

### Product Designation

Code Description	13 mm Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 012

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x16 mm
Minimum Pulley Diameter	150 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	22,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 AGT PU

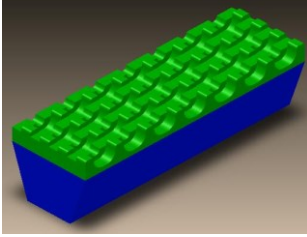

### Product Designation

Code Description	13 mm With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 40 013

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x13 mm
Minimum Pulley Diameter	80 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	6,70 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 B

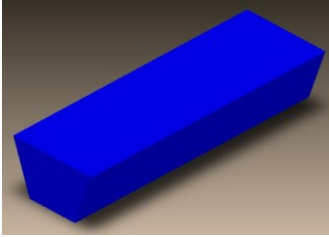

### Product Designation

Code Description	17 mm Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 014

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x11,5 mm
Minimum Pulley Diameter	115 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	12,10 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 BDT

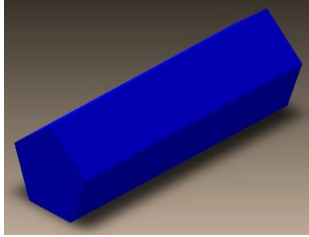

### Product Designation

Code Description	17 mm Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 015

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x19,5 mm
Minimum Pulley Diameter	185 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	32,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 BGT PU

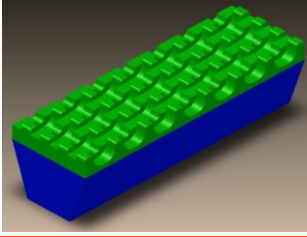

### Product Designation

Code Description	17 mm With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 40 016

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x16,5 mm
Minimum Pulley Diameter	115 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	12,10 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 C

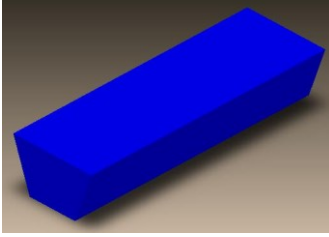

### Product Designation

Code Description	22 mm Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 017

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x14,5 mm
Minimum Pulley Diameter	145 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	20,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 CDT

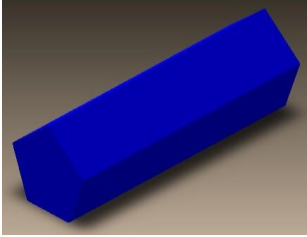

### Product Designation

Code Description	22 mm Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 018

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x24,5 mm
Minimum Pulley Diameter	235 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	64,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBL 88 CGT PU

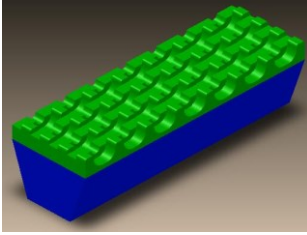

### Product Designation

Code Description	22 mm With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 40 019

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x19,5 mm
Minimum Pulley Diameter	145 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	20,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 A

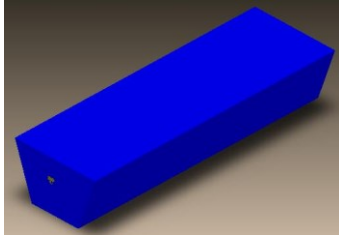

### Product Designation

Code Description	13 mm Reinforced Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 031

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x8 mm
Minimum Pulley Diameter	80 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	28,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 ADT

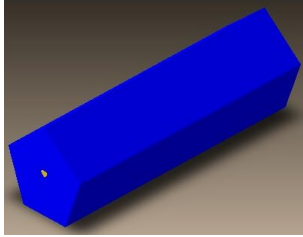

### Product Designation

Code Description	13 mm Reinforced Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 032

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x16 mm
Minimum Pulley Diameter	150 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	24,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 AGT PU

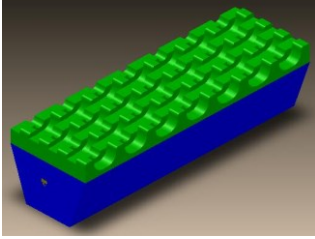

#### Product Designation

Code Description	13 mm Reinforced With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 40 033

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	13x13 mm
Minimum Pulley Diameter	80 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	24,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


#### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 B

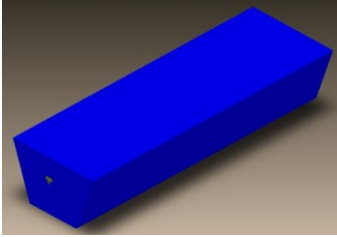

### Product Designation

Code Description	17 mm Reinforced Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 034

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x11,5 mm
Minimum Pulley Diameter	115 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	42,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

#### VSBLR 88 BDT

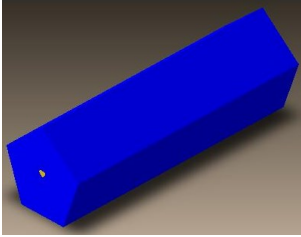

### Product Designation

Code Description	17 mm Reinforced Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 035

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	17x19,5 mm
Minimum Pulley Diameter	185 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	46,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 BGT PU

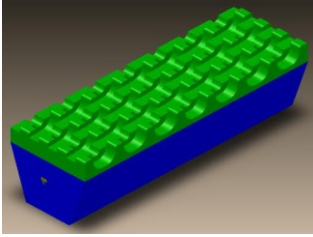

#### Product Designation

Code Description	17 mm Reinforced With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 40 036

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	17x16,5 mm
Minimum Pulley Diameter	115 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	42,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing
	Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


#### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 C

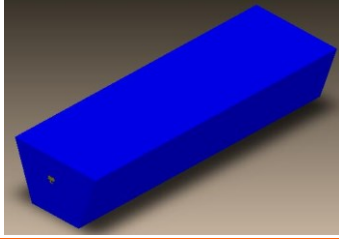

### Product Designation

Code Description	22 mm Reinforced Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 037

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x14,5 mm
Minimum Pulley Diameter	145 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	48,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 CDT

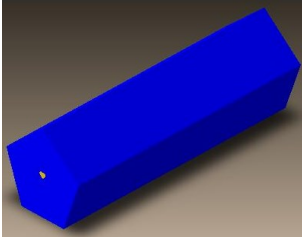

### Product Designation

Code Description	22 mm Reinforced Diamond Top Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying
Special Features	Elastic Belts
ATK Part No	115 40 038

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	22x24,5 mm
Minimum Pulley Diameter	235 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	52,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

VSBLR 88 CGT PU

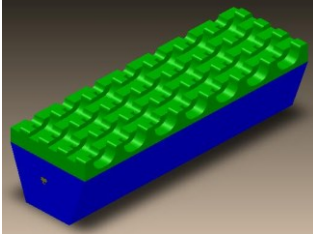

#### Product Designation

Code Description	22 mm Reinforced With Supergrip Vee Belt
Product Group	Poliurethane Vee Belt
Belt Applications	General Conveying , Ramp Transfer
Special Features	Elastic Belts
ATK Part No	115 40 039

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue + Green Supergrip
Coating Material	Thermoplastic Polyurethane ( TPU )
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	22x19,5 mm
Minimum Pulley Diameter	145 mm
Hardness	88 ShrA
Tensile Force For %1 Elongation	48,00 N
Operating Temperature	-30/+70 °C
Packing Size	30 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing
	Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.


#### Contact Information

<b>ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.</b>	
Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

DVS 83 K

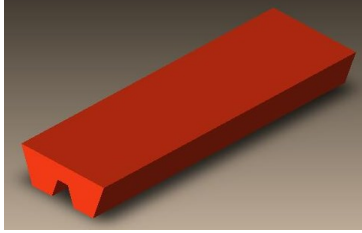

### Product Designation

Code Description	15x8,5 mm Poliurethane Double Vee Belt
Product Group	Poliurethane Double Vee Belt
Belt Applications	General Conveying , Chocalate Transfer
Special Features	Elastic Belts
ATK Part No	115 50 001

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Orange
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	15x8,5 mm
Minimum Pulley Diameter	25 mm
Hardness	83 ShrA
Tensile Force For %1 Elongation	1,00 N
Operating Temperature	-40/+60 °C
Packing Size	50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

DVS 83 L

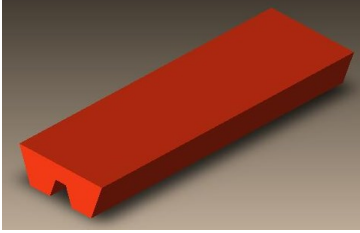

### Product Designation

Code Description	21x8,5 mm Poliurethane Double Vee Belt
Product Group	Poliurethane Double Vee Belt
Belt Applications	General Conveying , Chocolate Transfer
Special Features	Elastic Belts
ATK Part No	115 50 002

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Orange
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	21x8,5 mm
Minimum Pulley Diameter	40 mm
Hardness	83 ShrA
Tensile Force For %1 Elongation	1,70 N
Operating Temperature	-40/+60 °C
Packing Size	50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

DVS 83 M

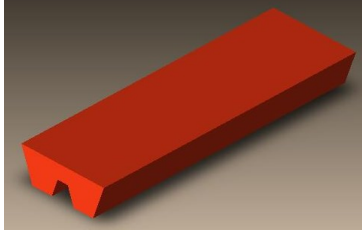

#### Product Designation

Code Description	24x6,8 mm Poliurethane Double Vee Belt
Product Group	Poliurethane Double Vee Belt
Belt Applications	General Conveying , Chococolate Transfer
Special Features	Elastic Belts
ATK Part No	115 50 003

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Orange
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	24x6,8 mm
Minimum Pulley Diameter	45 mm
Hardness	83 ShrA
Tensile Force For %1 Elongation	2,00 N
Operating Temperature	-40/+60 °C
Packing Size	50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

DVS 83 N

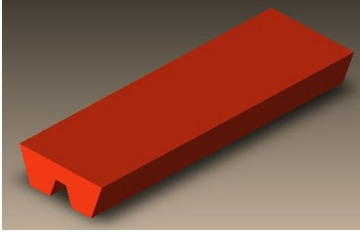

#### Product Designation

Code Description	30x8 mm Poliurethane Double Vee Belt
Product Group	Poliurethane Double Vee Belt
Belt Applications	General Conveying , Chocalate Transfer
Special Features	Elastic Belts
ATK Part No	115 50 004

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Orange
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	30x8 mm
Minimum Pulley Diameter	50 mm
Hardness	83 ShrA
Tensile Force For %1 Elongation	3,20 N
Operating Temperature	-40/+60 °C
Packing Size	50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPCS82-S1

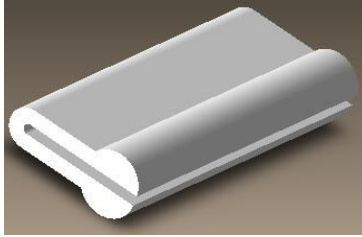

#### Product Designation

Code Description	27 mm Corner Belt Retaining Strip
Product Group	Special Profiles
Belt Applications	Corner Belt Retaining Strip
Special Features	Elastic Belts
ATK Part No	115 60 003

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Natural Clear
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	27 mm Tall
Minimum Pulley Diameter	64 mm
Hardness	82 ShrA
Tensile Force For %1 Elongation	N/A
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing/stitching/glueing to belt Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPCS82-S4

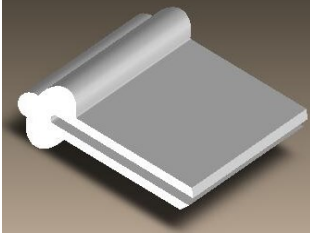

#### Product Designation

Code Description	27 mm Corner Belt Retaining Strip
Product Group	Special Profiles
Belt Applications	Corner Belt Retaining Strip
Special Features	Elastic Belts
ATK Part No	115 60 004

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Natural Clear
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	27 mm Tall
Minimum Pulley Diameter	64 mm
Hardness	82 ShrA
Tensile Force For %1 Elongation	N/A
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPCS82-S7

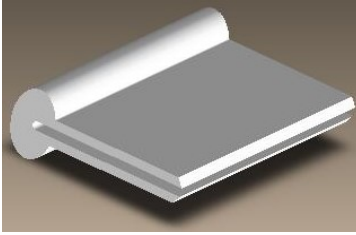

#### Product Designation

Code Description	27x8 mm Corner Belt Retaining Strip
Product Group	Special Profiles
Belt Applications	Corner Belt Retaining Strip
Special Features	Elastic Belts
ATK Part No	115 60 005

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Natural Clear
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	27 mm Tall x 8 mm Diameter Top
Minimum Pulley Diameter	64 mm
Hardness	82 ShrA
Tensile Force For %1 Elongation	N/A
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing/stritcking/gluing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPGS92-TV25K

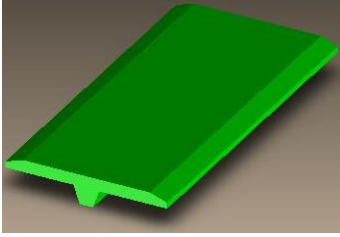

#### Product Designation

Code Description	25x5 mm Special Profile
Product Group	Special Profile
Belt Applications	Packaging Machines
Special Features	Elastic Belts
ATK Part No	115 60 021

#### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright or with Textured Top
Product Color	Green
Permanently Antistatic	No
Food Grade	Yes

#### Technical Data

Measurements	25x5 mm
Minimum Pulley Diameter	24 mm
Hardness	92 ShrA
Tensile Force For %1 Elongation	475 Kg/Cm2
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

#### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

#### Contact Information


##### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPOS82-S152

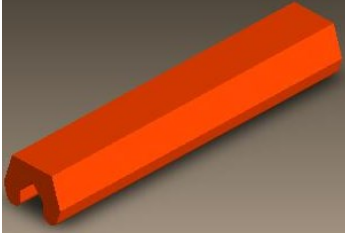

### Product Designation

Code Description	9,8x8 mm Fish Filleting Profile
Product Group	Special Profiles
Belt Applications	Fish Filleting Machines
Special Features	Elastic Belts
ATK Part No	115 60 022

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Orange
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	9,8x8 mm
Minimum Pulley Diameter	32 mm
Hardness	82 ShrA
Tensile Force For %1 Elongation	405 Kg/Cm2
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPBS82-S174

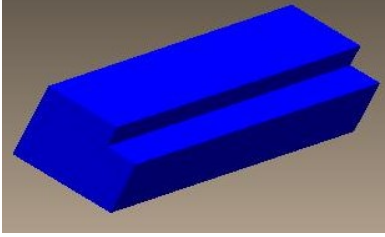

### Product Designation

Code Description	10x6 mm Belt Edge seal
Product Group	Special Profiles
Belt Applications	Belt Edge Seal/Tracking Guide
Special Features	Elastic Belts
ATK Part No	115 60 031

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	10x6 mm
Minimum Pulley Diameter	48 mm
Hardness	82 ShrA
Tensile Force For %1 Elongation	N/A
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPBS82-S66

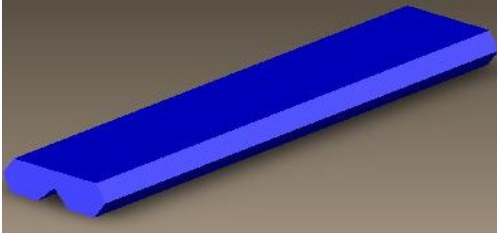

### Product Designation

Code Description	8,5x3 mm Tracking Guide
Product Group	Special Profiles
Belt Applications	Tracking Guide
Special Features	Elastic Belts
ATK Part No	115 60 032

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	Blue
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	8,5x3 mm
Minimum Pulley Diameter	24 mm
Hardness	82 ShrA
Tensile Force For %1 Elongation	N/A
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPWH90-S173

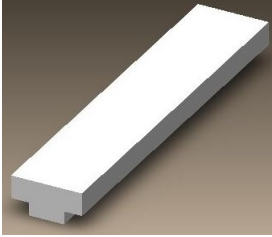

### Product Designation

Code Description	13x9 mm Flights for Timing Belt
Product Group	Special Profiles
Belt Applications	Flights For Timing Belt TPU and Others
Special Features	Elastic Belts
ATK Part No	115 60 051

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	13x9 mm
Minimum Pulley Diameter	72 mm
Hardness	90 ShrA
Tensile Force For %1 Elongation	N/A
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt

### Usage Instructions

Jointing Methods	Direct Jointing/hf welding/friction welding Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPWH90-S42

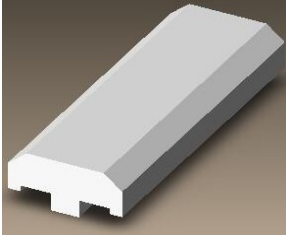

### Product Designation

Code Description	18x9,5 mm Flights for Timing Belt
Product Group	Special Profiles
Belt Applications	Flights For Timing Belt TPU and Others
Special Features	Elastic Belts
ATK Part No	115 60 052

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	White
Permanently Antistatic	No
Food Grade	Yes

### Technical Data

Measurements	18 mm Wide x 9,5 mm Deep
Minimum Pulley Diameter	20 mm
Hardness	90 ShrA
Tensile Force For %1 Elongation	N/A
Operating Temperature	-30/+80 °C
Packing Size	30 Mt - 50 Mt - 100 Mt colis alternatively in 1mtr lengths

### Usage Instructions

Jointing Methods	Direct Jointing/HF welding/Friction welding Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com

## Poliurethane Profile

### Product Data Sheet

SPWH90-S73

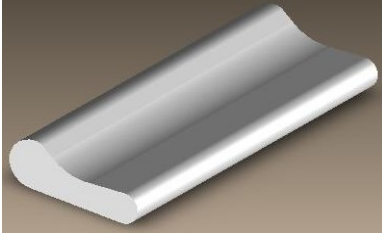

### Product Designation

Code Description	
Product Group	
Belt Applications	
Special Features	Elastic Belts
ATK Part No	115 08 004

### Product Construction

Product Material	Thermoplastic Polyurethane ( TPU )
Product Structure	Bright
Product Color	
Permanently Antistatic	
Food Grade	

### Technical Data

Measurements	
Minimum Pulley Diameter	
Hardness	
Tensile Force For %1 Elongation	
Operating Temperature	
Packing Size	

### Usage Instructions

Jointing Methods	Direct Jointing Overlap Joint
General Storage Instructions	Please Keep away From direct sunlight, UV radiation,dust and dirt. In the original packaging and keep cool and dry place. If it is possible to place on shelves or pallets in the store to be able to make contact. Do not put on any weight.

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com




## Applications



### GLASS

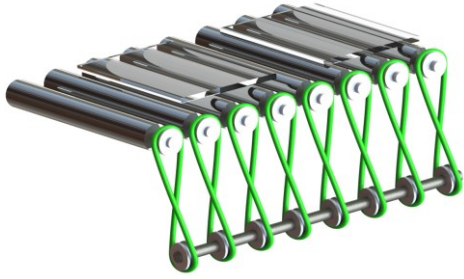

### CERAMIC TILES

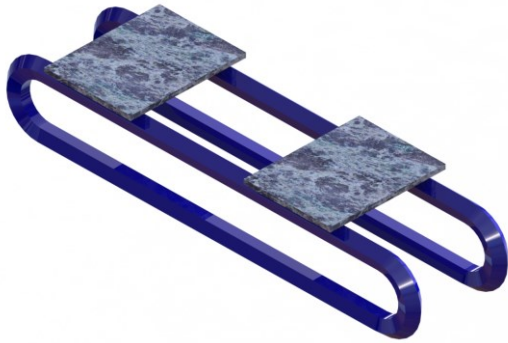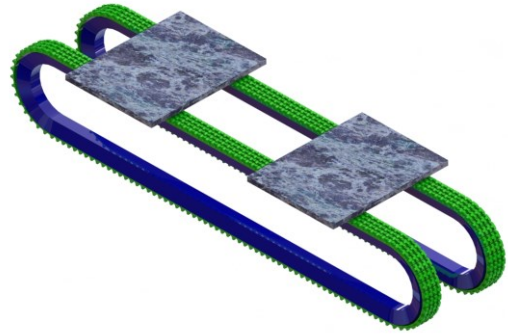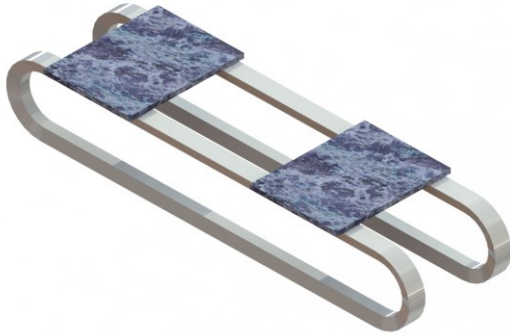

### Contact Information


#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com


## Applications




### WOODEN

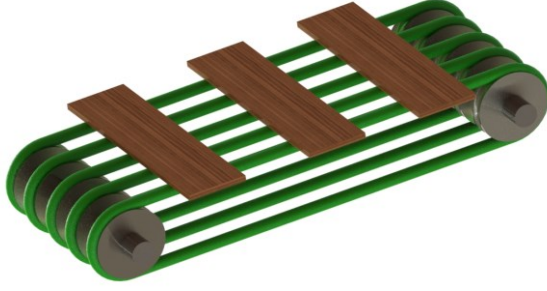

### AUTOMOTIVE

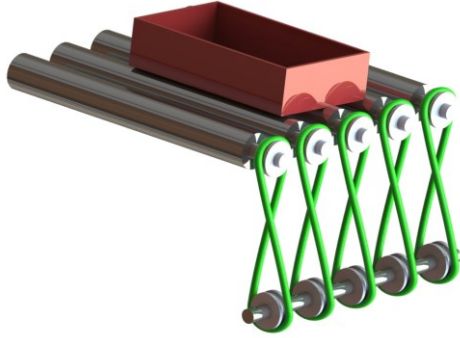

### FOOD

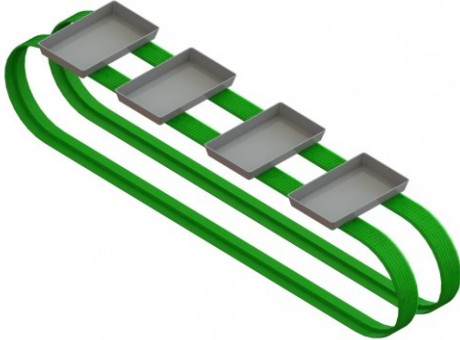

### Contact Information

#### ATK BANT VE KAYISILIK SAN. TIC. LTD. STI.

Adress	Istasyon Mah. Kahraman Sok. No:17 Kartepe / KOCAELI
Post Code	41 300
Country	TURKEY
Tel. No:	+90 262 373 64 64
Fax No:	+90 262 373 64 98
E-mail:	atk@atkbant.com
Wep:	www.atkbant.com